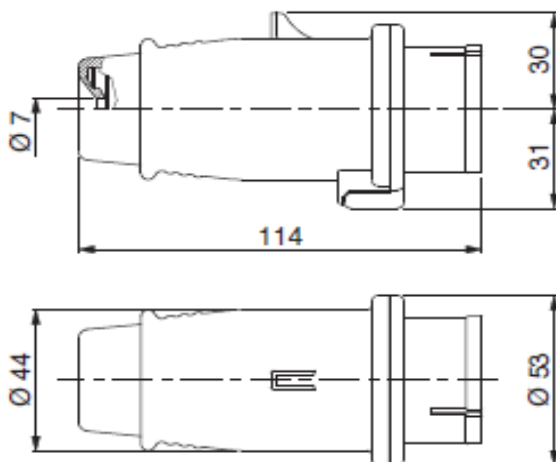


**200.01633**

Straight mobile plug Type 3A

**> DIMENSIONS****> REFERENCE STANDARD****EN 62196-1 (2012)**

Plugs, socket-outlets, vehicle couplers and vehicle inlets.  
Conductive charging of electric vehicles.  
Part 1: General requirements.

**EN 62196-2 (2012)**

Plugs, socket-outlets and vehicle couplers.  
Conductive charging of electric vehicles.  
Part 2: Dimensional interchangeability requirements  
for a.c. pin and contact-tube accessories.

**CEI 69-6 (2011)**

Standardization sheet of plug and socket-outlet for the  
connection of electric vehicles to the supply network.

**> TECHNICAL CHARACTERISTICS**

Rated current:	<b>16A</b>
Rated voltage:	<b>200-250VAC</b>
Frequency:	<b>50-60Hz</b>
Insulating voltage:	<b>250V</b>
Protection degree:	<b>IP44</b>
Operating temperature:	<b>-30°C +50°C</b>
Material:	<b>Engineering plastic</b>
Glow wire test:	<b>850°C</b>
IK degree at 20°C:	<b>IK07</b>
Color:	<b>Grey</b>
Number of poles:	<b>L1-N-E-CP</b>
Connection capability:	<b>1-2,5mm<sup>2</sup></b>
Salt mist:	<b>Resistant</b>
UV radiation:	<b>Resistant</b>