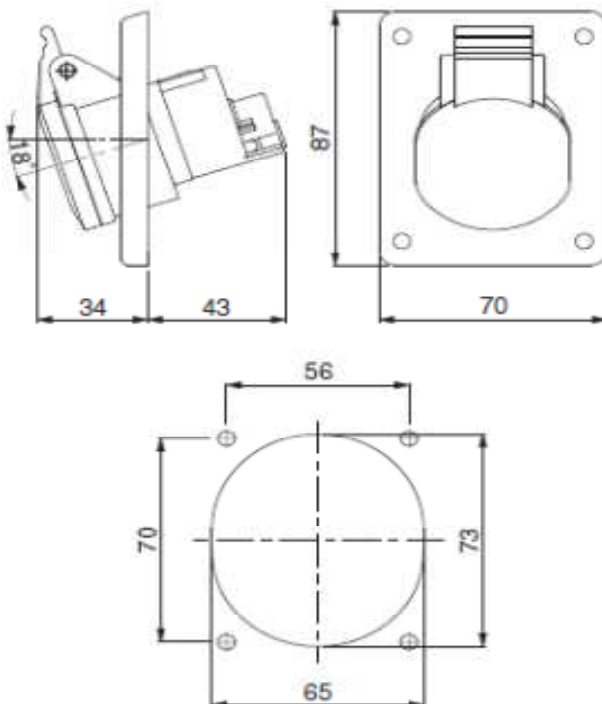


200.01663

Flush mounting socket with flange 70x87mm Type 3A

**> DIMENSIONS****> REFERENCE STANDARD****EN 62196-1 (2012)**

Plugs, socket-outlets, vehicle couplers and vehicle inlets.
Conductive charging of electric vehicles.

Part 1: General requirements.

EN 62196-2 (2012)

Plugs, socket-outlets and vehicle couplers.

Conductive charging of electric vehicles.

Part 2: Dimensional interchangeability requirements
for a.c. pin and contact-tube accessories.

CEI 69-6 (2011)

Standardization sheet of plug and socket-outlet for the
connection of electric vehicles to the supply network.

> TECHNICAL CHARACTERISTICS

Rated current:	16A
Rated voltage:	200-250VAC
Frequency:	50-60Hz
Insulating voltage:	250V
Protection degree:	IP44 (IPXXD)
Operating temperature:	-30°C +50°C
Material:	Engineering plastic
Glow wire test:	850°C
IK degree at 20°C:	IK07
Color:	Grey
Number of poles:	L1-N-E-CP
Connection capability:	1-4mm²
Salt mist:	Resistant
UV radiation:	Resistant