


200.33233C2/C4/C6

Spina mobile con morsetti a crimpare Tipo 3C



> DIMENSIONI

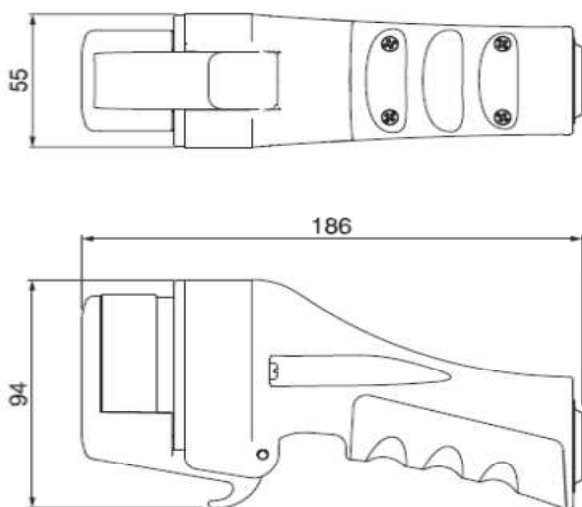

> NORME DI RIFERIMENTO

EN 62196-1 (2012)

Plugs, socket-outlets, vehicle couplers and vehicle inlets.

Conductive charging of electric vehicles.

Part 1: General requirements.

EN 62196-2 (2012)

Plugs, socket-outlets and vehicle couplers.

Conductive charging of electric vehicles.

Part 2: Dimensional interchangeability requirements for a.c. pin and contact-tube accessories.

> CARATTERISTICHE TECNICHE

Corrente nominale:	32A
Tensione nominale:	380-480VAC
Frequenza:	50-60Hz
Tensione d'isolamento:	500V
Grado di protezione:	IP44 (IPXXD)
Temperatura d'impiego:	-30°C +50°C
Materiale:	Tecnopolimero
Glow wire test:	850°C
Grado IK a 20°C:	IK08
Colore:	Grigio
Numero di poli:	L1-L2-L3-N-E-CP-PP
Capacità di connessione:	2,5 / 4 / 6mm²
Soluzione salina:	Resistente
Raggi UV:	Resistente

Accessori:

200.332KITC2: Kit spinotti a crimpare 2,5mm²

200.332KITC4: Kit spinotti a crimpare 4,0mm²

200.332KITC6: Kit spinotti a crimpare 6,0mm²