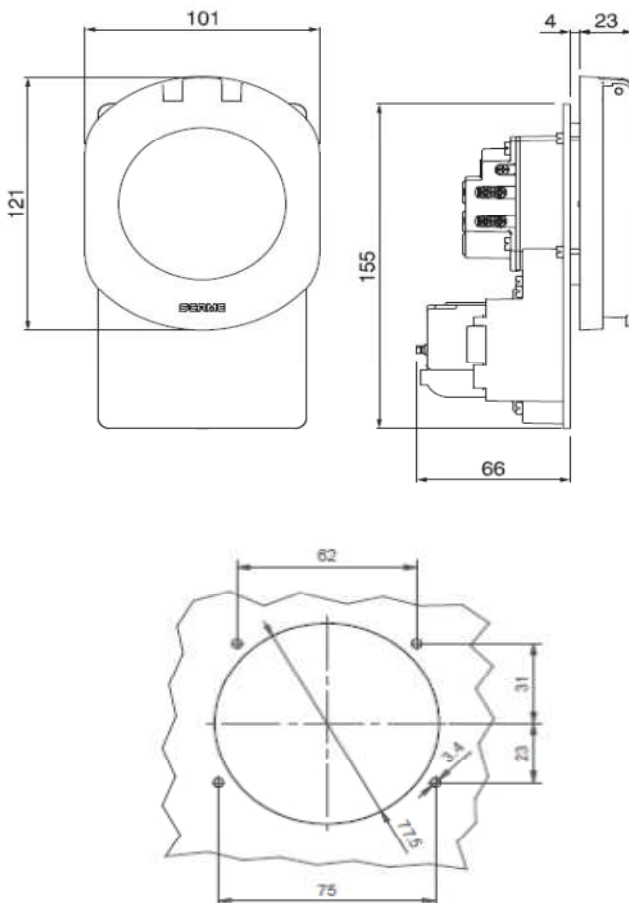


200.33263B

Flush mounting socket with latching system Type 3C

**> DIMENSIONS****> REFERENCE STANDARD****EN 62196-1 (2012)**

Plugs, socket-outlets, vehicle couplers and vehicle inlets.

Conductive charging of electric vehicles.

Part 1: General requirements.

EN 62196-2 (2012)

Plugs, socket-outlets and vehicle couplers.

Conductive charging of electric vehicles.

Part 2: Dimensional interchangeability requirements for a.c. pin and contact-tube accessories.

> TECHNICAL CHARACTERISTICS

Rated current:	32A
Rated voltage:	380-480VAC
Frequency:	50-60Hz
Insulating voltage:	500V
Protection degree:	IP54 (IPXXD)
Operating temperature:	-30°C +50°C
Material:	Engineering plastic
Glow wire test:	850-960°C
IK degree at 20°C:	IK08
Color:	Grey
Number of poles:	L1-L2-L3-N-E-CP-PP
Connection capability:	1,5-10mm²
Salt mist:	Resistant
UV radiation:	Resistant

> EQUIPMENTS

1 bistable actuator: 12Vdc for 1 second

3 switches: lock on/off, cover close