


200.CS3A13A1


Cord set with plug Type 3A 16A 1P
cable 3x2,5+1x0,5 5m - connector Type 3A 16A 1P



> PLUG DIMENSIONS

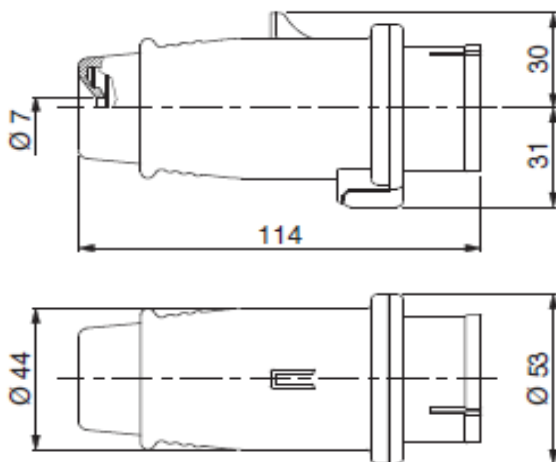

> CONNECTOR DIMENSIONS

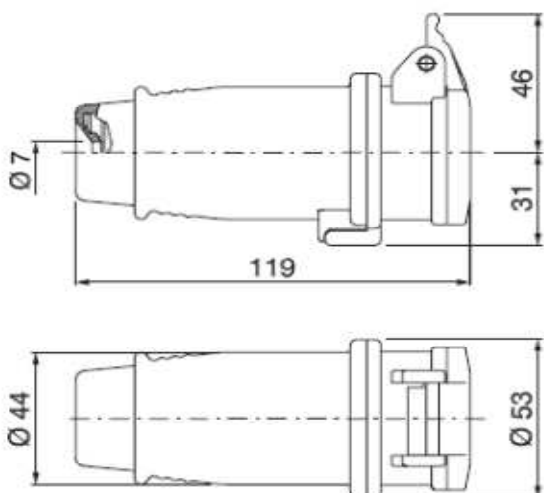

> REFERENCE STANDARD

EN 62196-1 (2012)

Plugs, socket-outlets, vehicle couplers and vehicle inlets.
Conductive charging of electric vehicles.

Part 1: General requirements.

EN 62196-2 (2012)

Plugs, socket-outlets and vehicle couplers.

Conductive charging of electric vehicles.

Part 2: Dimensional interchangeability requirements
for a.c. pin and contact-tube accessories.

CEI 69-6 (2011)

Standardization sheet of plug and socket-outlet for the
connection of electric vehicles to the supply network.

> TECHNICAL CHARACTERISTICS

Rated current:	16A
Rated voltage:	200-250VAC
Frequency:	50-60Hz
Insulating voltage:	250V
Protection degree:	IP44
Operating temperature:	-30°C +50°C
Material:	Engineering plastic
Salt mist:	Resistant
UV radiation:	Resistant

> CABLE

Rated voltage:	300/500V
Insulation/Sheath:	TPE / TPE
Max. temperature:	+105°C