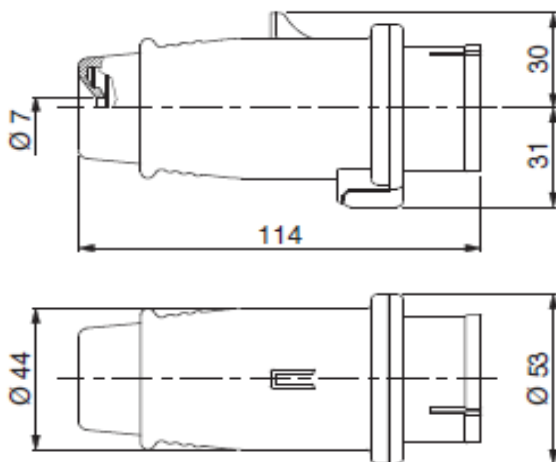
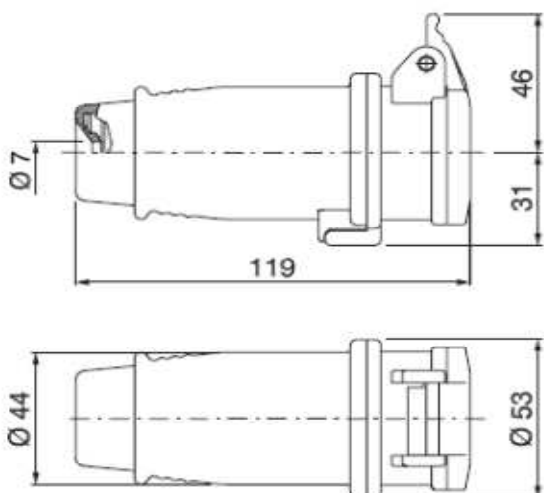


200.CS3A13A1

Cord set con spina Tipo 3A 16A 1P
cavo 3x2,5+1x0,5 5m - presa Tipo 3A 16A 1P

**> DIMENSIONI SPINA****> DIMENSIONI PRESA****> NORME DI RIFERIMENTO****EN 62196-1 (2012)**

Plugs, socket-outlets, vehicle couplers and vehicle inlets.
Conductive charging of electric vehicles.
Part 1: General requirements.

EN 62196-2 (2012)

Plugs, socket-outlets and vehicle couplers.
Conductive charging of electric vehicles.
Part 2: Dimensional interchangeability requirements
for a.c. pin and contact-tube accessories.

CEI 69-6 (2011)

Foglio di unificazione di prese a spina per la connessione
alla rete elettrica di veicoli elettrici stradali.

> CARATTERISTICHE TECNICHE

Corrente nominale:	16A
Tensione nominale:	200-250VAC
Frequenza:	50-60Hz
Tensione d'isolamento:	250V
Grado di protezione:	IP44
Temperatura d'impiego:	-30°C +50°C
Materiale:	Tecnopolimero
Soluzione salina:	Resistente
Raggi UV:	Resistente

> CAVO

Tensione nominale:	300/500V
Isolante/Guaina:	TPE / TPE
Temperatura massima:	+105°C