

204.WB16E-T2


Plastic wall mounting box with
1 socket Type 2 16A 400Vac 11kW with plug lock



> FUNCTIONS

charge in mode 3 with pwm circuit pilot
identification of connected cord-set size
managing of latching system
working in mode stand-alone free

> DIMENSIONS

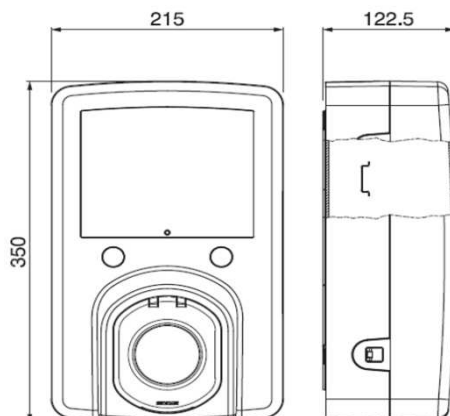

> REFERENCE STANDARD

EN 61851-1 (2011)

Electric vehicle conductive charging system.
Part 1: General requirement.

EN 61439-1 (2011)

Low-voltage switchgear and control gear assemblies.
Part 1: General requirement.

> TECHNICAL CHARACTERISTICS

Rated current:	16A
Rated voltage:	400Vac
Frequency:	50-60Hz
Insulating voltage:	500V
Protection degree:	IP54
Operating temperature:	-25°C +40°C
Material:	Engineering plastic
Glow wire test:	650°C
IK degree at 20°C:	IK08
Color:	Grey
Mounting:	Wall mounting
Salt mist:	Resistant
UV radiation:	Resistant

> EQUIPMENTS

1 terminal strip 5x10mm2
1 current transformer
1 modular contactor 4P 20A 24Vdc
1 fuse holder 1P+N gG 4A
1 power supply 24Vdc 36W
1 control card
1 couple of service led
1 stop charge push-button (mode free)

excluded:

upstream protection (by the installer):
1 circuit breaker 3P+N C20 30mA ist. B
emergency line 24Vdc (optional)